



E01 V2.0



MINI EDC FLASHLIGHT



100 LUMENS MAXIMUM OUTPUT



35 METERS MAXIMUM BEAM DISTANCE

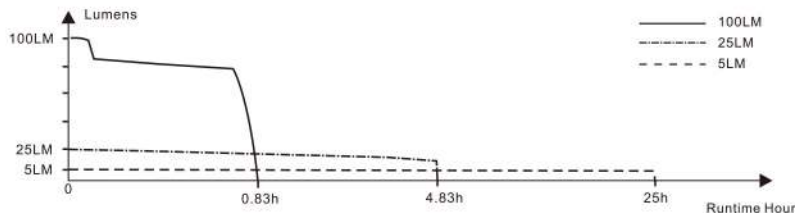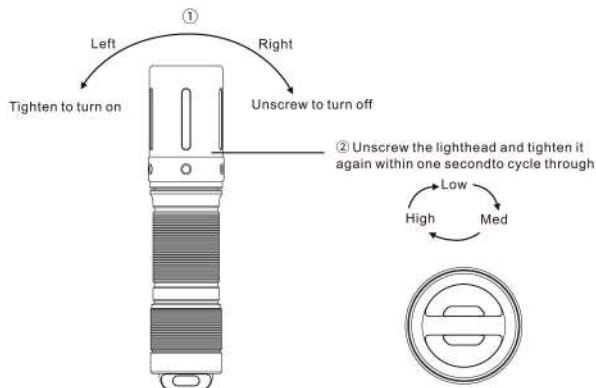

(ENGLISH)FENIX E01 V2.0 FLASHLIGHT

- Utilizes Cree XP-G2 S3 LED with a lifespan of 50,000 hours.
- Included one AAA battery.
- Ultra-compact size for everyday carry.
- One-handed operation with the rotating switch.
- All-metal CNC machining light body.
- Premium type HAIII hard-anodized anti-abrasive finish.
- Size: 2.62" x 0.59" x 0.55" / 66.5 x 15 x 14 mm.
- Weight: 0.46 oz / 13 g (excluding battery)

OPERATING INSTRUCTION

On/off ①
Tighten the light head to turn on the light, unscrew the light head to turn off the light.

Output Selection ②
Unscrew the lighthouse and tighten it again within one second to cycle through Low→Med→High.

BATTERY SPECIFICATIONS

Type	Dimensions	Nominal Voltage	Usability	
Ni-MH Battery	AAA	1.2V	Recommended	✓✓
Alkaline Battery	AAA	1.5V	Usable	✓
Non-rechargeable Battery (Lithium)	AAA	1.5V	Usable	✓
Rechargeable Battery (Li-ion)	10440 / 10450	3.7V	Banned	✗

BATTERY REPLACEMENT

Unscrew the light head and insert the battery with the anode side (+) towards the light head, then screw the light head back on.

TECHNICAL PARAMETERS

ANSI/PLATO FL1		HIGH	MED	LOW
OUTPUT		100 lumens	25 lumens	5 lumens
RUNTIME	ALKALINE BATTERY	50 minutes*	4 hours 50 minutes	25 hours
	NI-MH BATTERY	50 minutes*	4 hours 30 minutes	23 hours
DISTANCE		35 meters	19 meters	9 meters
INTENSITY		304 candela	88 candela	21 candela
IMPACT RESISTANCE		1 meter		
SUBMERSIBLE		IP68, 2 meters underwater		

▲ Note: The above specifications are from the results produced by Fenix through its laboratory testing using the included Pairdeer Alkaline and 750 mAh/Ni-MH battery under the temperature of 21±3°C and humidity of 50% -80%. The true performance of this product may vary according to different working environments and the actual battery used.
*The High output is measured in total of runtime including output at reduced levels due to temperature or protection mechanism in the design.

INTELLIGENT OVERHEAT PROTECTION

The light will accumulate a lot of heat when used on High output level for extended periods. To reduce the temperature, the light will automatically step down a few lumens. High output level can be reselected if needed.

USAGE AND MAINTENANCE

- Disassembling the sealed head can cause damage to the light and will void the warranty.
- Fenix recommends using an excellent quality battery.
- If the light will not be used for an extended period, remove the battery, or the light could be damaged by electrolyte leakage or battery explosion.
- Long-term use can result in O-ring wear. To maintain a proper water seal, replace the ring with an approved spare.
- Periodic cleaning of the battery contacts improves the light's performance as dirty contacts may cause the light to flicker, shine intermittently or even fail to illuminate for the following reasons:

- A: The battery needs replacing.
Solution: Replace battery (Ensure battery is inserted according to the manufacturer's specifications).
- B: The threads, PCB board contact or other contacts are dirty.
Solution: Clean the contact points with a cotton swab soaked in rubbing alcohol.

INCLUDED

E01 V2.0 flashlight, Pairdeer AAA battery, Key chain, Spare O-ring, User manual, Warranty card.

WARNING

- This flashlight is a high-intensity lighting device capable of causing eye damage to the user or others. Avoid shining the flashlight directly into anyone's eyes.
- All information provided in this manual is subject to change without prior notice.



FACEBOOK

"Follow" us for more information about Fenix.



WECHAT

扫描并关注，获取更多Fenix相关信息

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181
E-mail: Info@fenixlight.com Web: www.fenixlight.com
Address: 8/Floor, Spring Valley, (Wonderful Life Wisdom Valley) Meisheng Huiju Technology Industrial Park, 83 Dabao Road, Bao'an District, Shenzhen 518133, China



61.122.391.087-A1-20200713