

TK25R

MULTIFUNCTION LAW
ENFORCEMENT AND
DUTY FLASHLIGHT



3600 LUMENS MAX
OUTPUT



350 METERS MAX BEAM
DISTANCE

WARNING

- Do NOT place this flashlight in the reach of children!
- Do NOT shine this flashlight directly into the eyes of anyone!
- Do NOT place light head near flammable objects, high temperatures can cause objects to overheat and become flammable/ignited!
- Do NOT use this flashlight in inappropriate ways such as holding the unit in your mouth, doing so could cause serious personal injury or death if the light or internal battery fails!
- This flashlight will accumulate a significant amount of heat while operating, resulting in a high temperature of the light shell. Pay close attention to avoid burns!
- Turn off and lock the flashlight or remove the battery to prevent accidental activation when the flashlight is placed in a closed and flammable environment such as pockets and backpacks!
- The LEDs of this flashlight are not replaceable; so the whole light will need to be replaced when any one of the LEDs reaches the end of its lifespan!
- Notice: UV emitted from this product. Minimise exposure to eyes or skin. Use appropriate shielding.

(ENGLISH)FENIX TK25R FLASHLIGHT

- 3600 lumens maximum output, 350 meters maximum beam distance.
- Main light uses one Cree XHP50.2 LED, with a lifespan of 50,000 hours.
- Powered by an included Fenix ARB-L21-5000 V2.0 battery and compatible with a Fenix ARB-L21-6000 battery.
- Equipped with a multi-LED system featuring high-power tactical light, wide side light, UV light, red light, red flashing light, and red-and-blue flashing light.
- Toggle switch enables convenient switching between Duty mode, Lockout/Off mode, and Tactical support mode for various scenarios.
- Professional spot-and-floodlight for both broad up-close illumination and long-distance lighting.
- Dual tail switch for momentary-on, instant turbo, and instant strobe.
- USB port supports fast charging and allows the flashlight to be fully charged in just 1.5 hours.
- Made of durable A6061-T6 aluminum.
- Full-metal CNC machining light body.
- Premium type HALL hard-anodized anti-abrasive finish.
- Size: 6.46" x 1.42" x 1.03" / 164 x 36 x 26.2 mm.
- Weight: 7.94 oz/225 g (including battery).



OPERATING INSTRUCTIONS

On/Off

Tap the tactical switch to turn on the light momentarily, release it and the light will go out.
Fully press the tactical switch to constantly turn on the light, fully press the tactical switch again to turn off the light.

Mode Switching

In any state, turn the tail toggle switch to select the needed mode, turn the toggle switch to the left and to enter Duty mode, turn the toggle switch to the right and to enter Tactical support mode, to the middle to enter Lockout/Off mode.

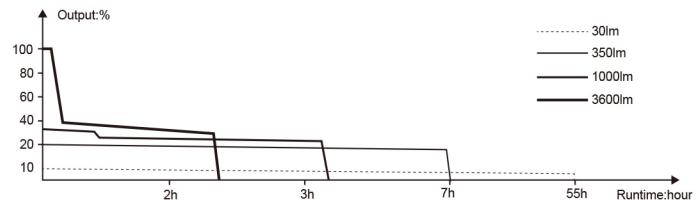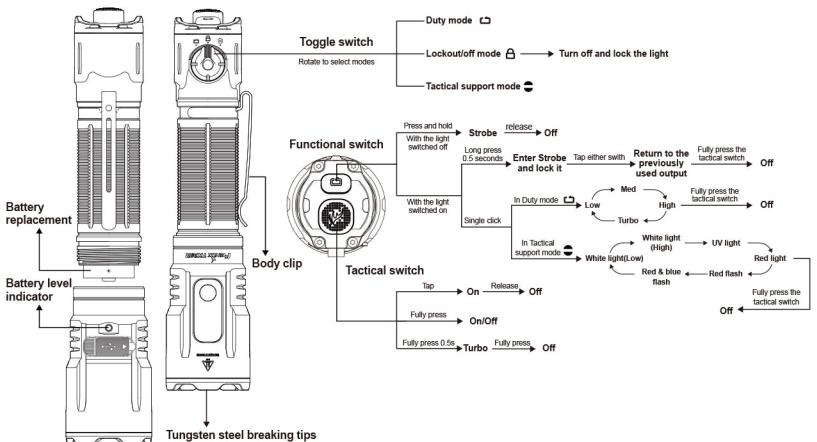

TECHNICAL PARAMETERS

ANSI/ PLATO FL1	DUTY MODE					TACTICAL SUPPORT MODE					
	TURBO	HIGH	MED	LOW	STROBE	WHITE LIGHT (HIGH)	WHITE LIGHT (LOW)	UV LIGHT	RED LIGHT	RED FLASH	RED & BLUE FLASH
≤% OUTPUT	3600 lumens	1000 lumens	350 lumens	30 lumens	3600 lumens	150 lumens	30 lumens	900mW/365nm	15 lumens	15 lumens	15 lumens
Runtime	2 hours	20 minutes*	7 hours	55 hours	/	5 hours	30 hours	/	20 hours	/	/
Distance	350 meters	170 meters	100 meters	30 meters	/	/	/	/	/	/	/
Intensity	28000 candela	7500 candela	2600 candela	270 candela	/	/	/	/	/	/	/
Impact	1 meter										
Submersible	IP68										

Note: According to the ANSI/PLATO FL1 standard, the above specifications are from the results produced by Fenix through its laboratory testing using one Fenix ARB-L21-5000 V2.0 battery under the temperature of 21±3°C and humidity of 50% - 80%. The true performance of this product may vary according to different working environments and the actual battery used.

*The Turbo output is measured in total of runtime including output at reduced levels due to temperature or protection mechanism in the design.

Output Selection

Duty mode: In Duty mode, single click the functional switch to cycle through Low—Med—High—Turbo.

Tactical support mode: In Tactical support mode, single click the functional switch to cycle through White light(Low)—White light(High)—Red & blue flash.

Lockout/Off mode: When the light turned on, turn the tail toggle switch to Lockout/Off mode to turn off and lock the light. The dual tail switch will not be available to any operation.

Instant Turbo

On: With the light turned on, fully press the tactical switch and hold it for 0.5 seconds to enter Turbo. Single click the functional switch to switch to the Low output if the light is in Duty mode, or return to the previously used output if the light is in Tactical support mode.

Off: Fully press the tactical switch to turn off the light.

Instant Strobe

With the light turned on, press, and hold the functional switch for 0.5 seconds to enter Strobe. Single click the functional switch or tap the tactical switch to previous the previously used output.

Instantly, release it and the light will go out.

Intelligent Memory Circuit

The flashlight automatically memorizes the previously selected output excluding Strobe. When turned on again, the previously used output of the currently selected mode will be recalled.

BATTERY SPECIFICATIONS

Type	Dimensions	Nominal Voltage	Usability
Fenix ARB-L21-6000B	21700	3.6 V	Recommended ✓✓
Fenix ARB-L21-6000	21700	3.6 V	Recommended ✓✓

LIGHTING FOR EXTREMES



FACEBOOK



WECHAT

"Follow" us for more information about Fenix.

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181
E-mail: info@fenixlight.com Web: www.fenixlight.com
Address: 2/F3/F, West of Building A, Xinghong Technology Park, 111 Shuiku Road, Fenghuanggang Community, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province, China



61.149.221.155-A1-20250902

BATTERY LEVEL INDICATION

Each time the flashlight is turned on, the indicator will indicate the battery level and will last for 3 seconds.

Green light on: saturated 100% - 85%

Green light flashes: sufficient 85% - 50%

Red light on: poor 50% - 25%

Red light flashes: critical 25% - 1%

*Note: This only works with a Fenix ARB-L21 Series battery.

INTELLIGENT OVERHEAT PROTECTION

The flashlight will accumulate a lot of heat when used at high output levels for extended periods. When the flashlight reaches a temperature of 60°C/140°F or above, it will automatically step down a few lumens to reduce the temperature. When the temperature drops below 60°C/140°F, the flashlight will gradually return to the preset output level.

LOW-VOLTAGE WARNING

When the voltage level drops below the preset level, the flashlight is programmed to downshift to a lower brightness level until Low output is reached. When this happens in Low output, the battery level indicator blinks to remind users to recharge or replace the battery in a timely manner.

*Note: This only works with a Fenix ARB-L21 Series battery.

USAGE AND MAINTENANCE

Disassembling the sealed head can cause damage to the flashlight and will void the warranty.

Recharge the battery in time to ensure normal use for next time.

*Fenix recommends using an excellent quality battery.

If the flashlight will not be used for an extended period, remove the battery, or the flashlight could be damaged by electrolyte leakage or explosion.

Lock the flashlight or take out the battery to prevent accidental activation during storage or transport.

Long storage may result in O-ring wear. To maintain a proper water seal, replace the ring with an approved spare.

Periodic cleaning of the flashlight and battery contacts improves the flashlight's performance as dirty contacts may cause the flashlight to flicker, shine intermittently or even fail to illuminate for the following reasons:

A: Poor battery level.

Solution: Recharge or replace the battery.

B: Poor contact or contact point of the battery or flashlight is dirty.

Solution: Clean the contact points with a cotton swab soaked in rubbing alcohol.

If the above methods don't work, please contact the distributor.

INCLUDED

Fenix TK25R flashlight, ARB-L21-5000 V2.0 battery, USB Type-C charging cable, Holster, Lanyard, Spare O-ring, User manual, Warranty card