




LD01 Flashlight

Fenix LD01 is extremely small, not much bigger than the AAA cell it uses. It offers three levels of brightness: Medium -> Low -> High, which allows the user to select the best compromise between brightness and runtime for any given task. The Fenix LD01 uses just one common AAA battery, and thanks to its negligible size and weight. It is perfect for Everyday Carry (EDC).

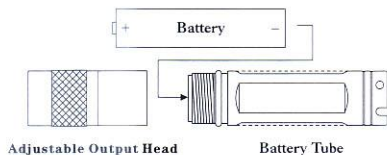

Features

- ◎ Cree XP-E LED (R2) with lifespan of 50,000 hours
- ◎ Three output types: 28 Lumens (3.5hrs) -> 9 Lumens (11hrs) -> 85 Lumens (1hrs)
- ◎ Uses one 1.5V AAA (Ni-MH, Alkaline) batteries, inexpensive and widely available
- ◎ Working voltage: 0.9-1.7V
- ◎ 75mm (Length) x 14mm (Diameter)
- ◎ Made of durable aircraft-grade aluminum
- ◎ Premium Type III hard-anodized anti-abrasive finish
- ◎ 14-gram weight (excluding batteries)
- ◎ Waterproof to IPX-8 Standard
- ◎ Toughened ultra-clear glass lens with anti-reflective coating
- ◎ Reliable twist switch
- ◎ Accessories: Body clip, key-ring, and a spare o-ring

Note: The above-mentioned parameters are approximate and may vary between flashlights, batteries, and environments.

Operation

Turn the head of the flashlight clockwise to turn on the flashlight. A counter clockwise turn will then switch it off. To toggle between brightness levels, turn the light on, and then turn it off. Within 1.5 seconds after being turned off, twist the head on again and it will be switched to the next brightness level. Just do the same thing to switch it to the third stage and so forth. Keep the light off for over 1.5 seconds, and the light will turn completely off, and the regulative circuit will be restored.

Battery Replacement

Unscrew the head to insert the battery with the anode side (+) toward the light's head, screw the head back on to test.



LD01

Max 85 Lumens

Usage and Maintenance

Ⓢ Please don't disassemble the sealed head, doing so can cause damage to the flashlight and will void the warranty.

Ⓢ High-power flashlight should use battery with high current discharge ability, we suggest using high performance Ni-MH rechargeable battery, using alkaline battery will lower the runtime of high intensity flashlight.

Ⓢ Please use battery of high quality, and take out the battery if the flashlight will not be used for a long time, or it may cause damage from electrolyte leakage or battery explosion.

Ⓢ Please replace the O-ring if they are damaged after using for a long time and regularly lubricate the o-rings as to not erode the rubber. Doing so will keep the flashlight properly sealed against water.

Ⓢ Please clean the contacts of your light from time to time, especially if the light flickers or doesn't light up. There may be several reasons for a flickering or not working light:

Reason A: The battery needs replacing.

Solution: Replace batteries (Please confirm the correct installation of anode and cathode).

Reason B: The threads, PCB board contact or other contacts are dirty.

Solution: Clean the contact points with an alcohol soaked cotton swab.

If the above methods don't work, please contact the distributors and refer to the warranty policy.

Product Warranty

We will replace products afflicted with manufacturing defects within 15 days of purchase and repair a light free of charge within 24 months of purchase if problems develop with normal use; if repair is required after 24 months from the date of purchase, we will charge for parts. The total repair fee is dictated by the cost of the replaced materials.

Warranty Card Registration

We kindly suggest that you register your guarantee card on the official website for Fenixlight Limited. You can get an extra six-month warranty period once you have successfully registered. What's more, you could take part in the lottery of questionnaire at the same time.

Warning

The LD01 is a high-intensity lighting device and capable of causing eye damage; avoid shining the light directly into the eyes.



LD01

Max 85 Lumens

User manual

*Fenix Flashlight
Illuminate Your Adventure*