




TK40 Flashlight

The Fenix TK40 flashlight delivers an amazing 630 lumens of brightness and throws an impressive 275 meters long beam, much brighter than a 10 watt HID light and similar in performance to a car spotlight. The TK40 is designed for outdoor search, cave exploration, or any activity that requires a reliable high output flashlight.

Unique in the flashlight industry for its combination of high quality and versatility, the TK40 fuses its outstanding performance with a perfect user interface, excellent ergonomics and light weight to make it the best handling flashlight in its class.

Moreover, with 4 levels of primary output, 4 flickering modes and an ability to run for 12 continuous nights, the TK40 has the versatility to meet many different lighting requirements, making it an indispensable illuminating tool for outdoor exploration, cross country vehicles etc.

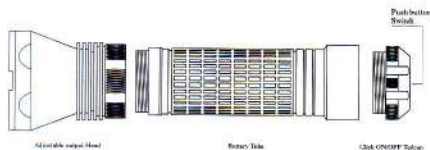

Features

- ④ 4 types of primary output:
Turbo (630 Lumens, 2Hrs, Default output) → Low (13 Lumens, 150Hrs) → Mid (93 Lumens, 20Hrs) → High (277 Lumens, 6.8Hrs)
- ④ 4 types of flashing output: Strobe, Slow flashing, SOS, Fast flashing
- ④ Max beam length: 275 meters
- ④ Central light strength: 18000 candelas
- ④ Withstand impact from 1.5 meters
- ④ Waterproof to IPX-8 Standard
- ④ Included accessories: lanyard, shoulder strap, one key ring, two spare o-rings, and a rubber switch boot
- ④ Cree MC-E LED with lifespan of 50,000 hours
- ④ Uses eight 1.5V AA (Ni-MH, Alkaline) batteries
- ④ 200mm (Length) x 40mm (Diameter of the body tube) x 62mm (Diameter of the head)
- ④ 266-gram weight (excluding batteries)
- ④ Digitally regulated output, maintains constant brightness
- ④ Push-button tail cap switch
- ④ Capable of standing up securely on a flat surface to serve as a candle
- ④ Patented structure avoid circuit damaging from reverse connection of battery
- ④ Made of durable aircraft-grade aluminum
- ④ Premium Type III hard-anodized anti-abrasive finish
- ④ Toughened ultra-clear glass lens with anti-reflective coating

Notice: The above-mentioned parameters (tested with 2500mAh Ni-MH batteries) are approximate and may vary between flashlights, batteries, and environments.

Operation

Press the tail cap switch to turn the flashlight on/off. Turn on the flashlight, and press the tail cap switch for more than one second to switch to the next primary output. The flashlight will remember the selected output when switched off. Flashing outputs: Each primary output corresponds with its flashing output. Double click the tail button switch for the corresponding flashing output when the flashlight is turned on. Another double click will return the light to the primary output mode. The 4 flashing outputs each correspond to their primary output modes as follows, (Turbo → Strobe, Low → Slow flashing, Mid → SOS, High → Fast flashing) Security setting: In order to avoid potential security hazard as a result of the heat generated on turbo mode when the light is unattended, TK40 will automatically switch to high lighting mode when working continuously at its turbo mode over 30 Minutes. If you need continue using turbo mode, please reset to its turbo mode manually.

Notice: the video for TK40 operation can be watched and downloaded through Fenix official website, please log onto the service channel -'light operation video'.

Battery Replacement

Unscrew the tail cap to take out the battery magazine (Eight AA batteries divided into four individual packs of two), insert the batteries with the negative terminal towards the spring. After loading the batteries into the magazine, insert the magazine with its top spring towards LED assembly. Rotate the tail cap clockwise then depress tail cap switch to test.

Usage and Maintenance

- ⊙ Please don't disassemble the sealed head, doing so can cause damage to the flashlight and will void the warranty.
- ⊙ High-power flashlight should use battery with high current discharge capability, we suggest using high performance Ni-MH rechargeable battery, using alkaline battery will lower the runtime of this high intensity flashlight.
- ⊙ Please use high quality batteries with the same electronic capacity, also we suggest to use batteries of the same brand, and take out the battery if the flashlight will not be used for a long time, or it may cause damage from electrolyte leakage or battery explosion.
- ⊙ If you leave the flashlight unused for a couple of days, please unscrew the head 2.5 turns to prevent slow discharge of the battery.
- ⊙ The flashlights automatic overheating protection may cause the light to flicker during prolonged running in a hot environment. If this occurs please turn to a lower output to cool the flashlight. Normal operation will be restored once the light cools down.
- ⊙ Please replace the O-rings if they are damaged after a long period of use. O- rings should be regularly lubricated to prevent erosion of the rubber. Doing so will also keep the flashlight properly sealed against water.
- ⊙ Please clean the contacts of your light from time to time, especially if the light flickers or doesn't light up. There may be several reasons for a flickering or not working light:

Reason A: The batteries need replacing.

Solution: Replace batteries (Please confirm the correct installation of anode and cathode).

Reason B: The threads PCB board contact or other contacts are dirty.

Solution: Clean the contact points with an alcohol soaked cotton swab.

If the above methods don't work, please contact your distributor and refer to the warranty policy.

Notice: The routine cleaning video can be watched and downloaded through Fenix official website, please log onto the service channel->'maintenance for light'.

Product Warranty

We will replace products afflicted with manufacturing defects within 15 days of purchase and repair a light free of charge within 24 months of purchase if problems develop with normal use; if repair is required after 24 months from the date of purchase, we will charge for parts. The total repair fee is dictated by the cost of the replaced materials.

Warranty Card Registration

We kindly suggest that you register your guarantee card on the official website for Fenixlight Limited. You can get an extra six-month warranty period once you have successfully registered. What's more, you could take part in the lottery of questionnaire at the same time.

Warning

TK40 is a high intensity lighting device and capable causing eye damage, avoid shining the light directly into the eyes

Avoid the use of 14500 rechargeable Li-ion battery or damage will be caused to the light circuit.



TK40

Max 630 Lumens

User manual

Fenix Flashlight
Illuminate Your Adventure