

# Compact Telehandlers

Regulatory area: NA

TF33.7





## Comfort: The best workplace



### Exclusive comfort

An unprecedented design guarantees maximum functionality and comfort; grouping the information provided to the driver and the controls of the various systems and devices for optimal ergonomics. The reverse shuttle on the steering wheel is also present on the joystick.

### Cab entry

To ensure simple and easy access to the cab, the door of Merlo telehandlers can be opened by up to 180°. In addition, the inside of the door is equipped with a large handrail to help the operator when getting inside and outside of the cab.

### Air-conditioning

Developed according to automotive standards, cutting the warm-up and cool-down times in half compared to a conventional air conditioning system. The inlet vent is placed on the side of the cab, away from potential sources of dust and dirt, while inside there are 8 vents.

## Efficiency: Simpler and smarter



### Transmission

In order to ensure a reduction in consumption and operating costs, Merlo telescopic handlers boast full electronic management of the transmission and engine, in order to minimise RPM and, consequently, fuel demand.

### Steering Modes

The axles ensure the maximum steering angle to perform manoeuvres in tight spaces. Additionally, the operator can manage the steering of the machine with three different options according to the specific needs of the job.

### Visibility

Merlo's improved visibility increases range of movement and safety for operators.

## Performance: Everything at your fingertips



### Transmission

The Merlo telehandlers have excellent braking capacity when the accelerator pedal is released, guaranteeing high torque to the wheels during material handling and transfers, as well as millimetric precision of movements when positioning the load.

### Engines

All models feature a combustion engine in an original Merlo mounting layout, developed by Merlo with the invention of the panoramic visibility models, ensuring maximum accessibility to components in case of programmed and/or extraordinary maintenance.

### Axles

The exclusively designed axles are manufactured and developed in-house by Merlo, and can be equipped with differential lock to ensure traction on any terrain, regardless of how unstable.

## Safety: Not just feelings



### Active safety

In order to remain fully compliant with regulations in frontal tipping prevention, Merlo handlers are equipped with features developed specifically to keep the operator safe from frontal tipping, without sacrificing performance, particularly of boom speed and lifting capacity.

### Aerial work platform

The Merlo telehandlers can be configured with aerial work platform. This solution, complying with EN280 standard, assures an increased level of active and passive safety during work at heights, and enhances machine versatility.

### Certified cab

All Merlo telehandlers have a metal structure above the glass roof on the outside of the cab to comply fully with FOPS Level II standard, the most stringent certification level in protecting the operator from falling objects.



<b>1 - 180° OPENING</b>	A door that made history! Merlo is the only manufacturer to offer a door with 180° split opening. Standard on the entire range.
<b>2 - COMPACTNESS</b>	Size matters! The absence of bulky counterweights, thanks to the studied balancing of the machine, makes Merlo models often the most compact in their category.
<b>3 - EPD ECO POWER DRIVE</b>	Maximum savings and efficiency! The Merlo-patented EPD system electronically controls engine and transmission. It manages engine speed, hydrostatic pump flow rate, and hydrostatic drive displacement, maximising efficiency and reducing RPM, saving up to 18% in fuel consumption.
<b>4 - IMPLEMENT RECOGNITION</b>	Every implement has its own features. Thanks to the automatic implement recognition system, the ASCS adapts load chart and safety limits to guarantee maximum performance in total safety at all times. Standard on the entire range.

**PERFORMANCE AND FEATURES****TF33.7-115EE4****TF33.7-115EE4****Performance**

Unladen weight (lb)	14330	14330
Maximum load capacity (lb)	7300	7300
Lift height (ft)	21' 7"	21' 7"
Maximum reach (ft)	11' 5"	11' 5"
Lift height at max. load capacity (ft)	17' 3"	17' 3"
Reach at max. load capacity (ft)	4' 6"	4' 6"
Load capacity at max. lift height (ft)	5000	5000
Load capacity at max. reach (lb)	2900	2900
Boom side-shift (in)	-	-
Frame levelling (%)	-	-
Boom section	2	2

**Powertrain**

Engine	Deutz TCD3.6	Deutz TCD3.6
Range/Cylinders	3600/4	3600/4
Engine power (kW/HP)	85/115	85/115
Anti-pollution technology	Tier 4 - SCR + DOC	Tier 4 - SCR + DOC
Reversible Fan	●	●
Maximum speed (mph)	25	25
Fuel tank capacity (gal)	22.5	22.5
AdBlue tank capacity (gal)	3.2	3.2
Hydrostatic transmission	●	●
EPD	Plus	Plus
Electronic joystick	STD	STD
Axles	Axial	Axial
Reducers	Epicyclic	Epicyclic
Brakes	Dry discs	Dry discs
Automatic parking brake	●	●

**Hydraulic**

Hydraulic pump	LS+FS	LS+FS
Delivery / pressure (bar-l/min)	33 - 3046	33 - 3046
Hydraulic oil tank capacity (gal)	22.5	22.5
Auxiliary hydraulic service on boom	●	●
Rear service line	○	○

**Cab**

Cab finishing	ECO	ECO
ASCS	Light	Light
FOPS II Cab	●	●
ROPS Cab	●	●
Controls	Electronic joystick control	Electronic joystick control
Tilting cab	—	—
Reverse shuttle	Dual reverse	Dual reverse

**Configuration**

Hydropneumatic Suspension CS Merlo	—	—
Hydropneumatic Suspension BSS Merlo	○	○
Hydropneumatic Suspension EAS Merlo	—	—
Work lights on cab	●	●
Sun-shade in the cab	○	○
Tac-lock	●	●
Pre-arrangement for aerial work platform	○	○
Two floating forks	●	●
Pedal Inching-Control	●	●
Permanent four-wheel drive	●	●
All wheel steering	●	●
Three steering way	●	●
Standard tyres	400/70-20	400/70-20
OPT tyres	405/70-24 400/70 24"	405/70-24 400/70 24"
Hydraulically controlled stabilizers	—	—
Turret rotation	—	—
Tractor type approval	—	—
Pneumatic brakes (ton)	—	—
Hydraulic brakes (ton)	○	○
PTO	-	-
3-point rear linkage	-	-


- not available
- standard
- optional



# Dimensions




	TF33.7-115EE4	TF33.7-115EE4
A - Length	170	170
C - Wheelbase	108	108
F - Ground clearance	11	11
H - Width	83	83
M - Cabin width	40	40
P - Height	84	84
R - Turning radius at wheels	155	155
S - Turning radius at forks	183	183

# Technical Details

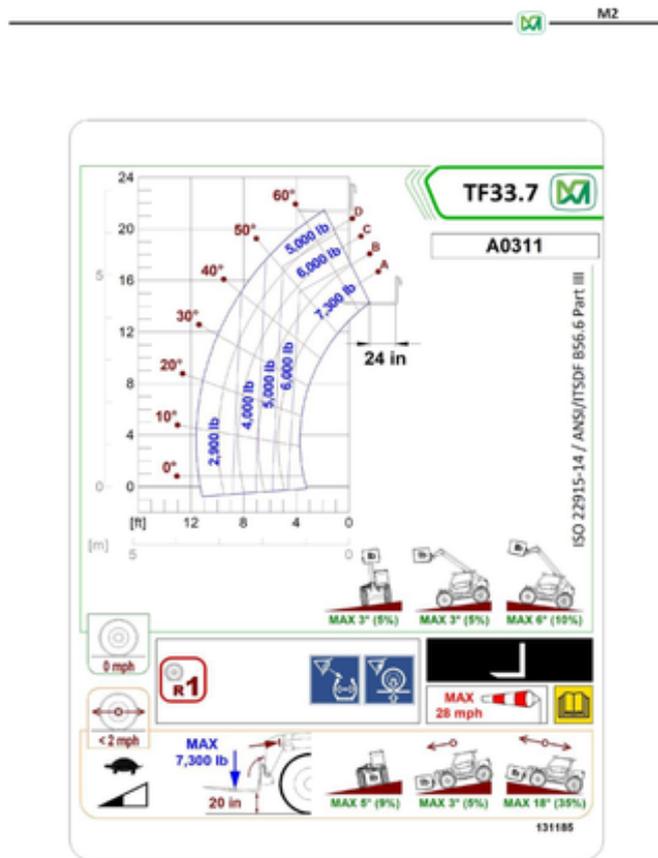

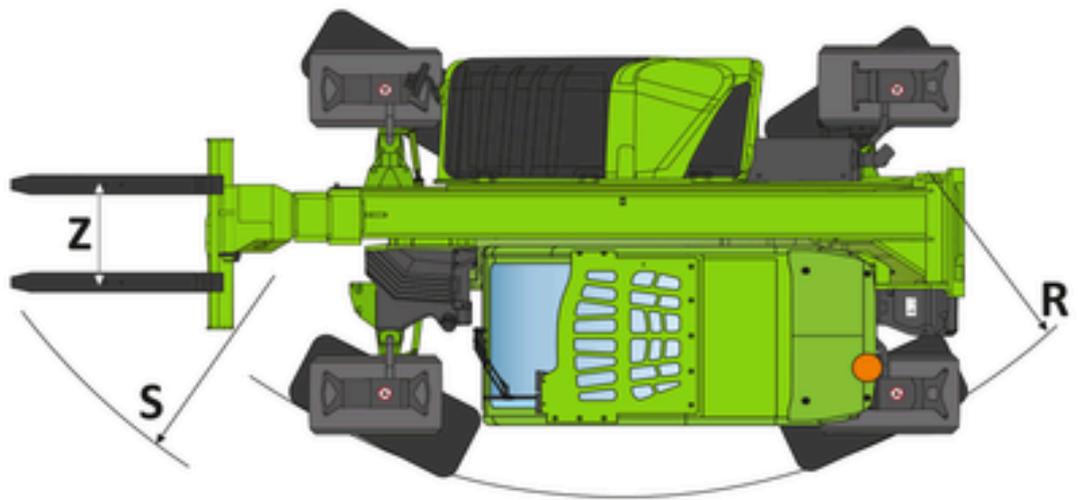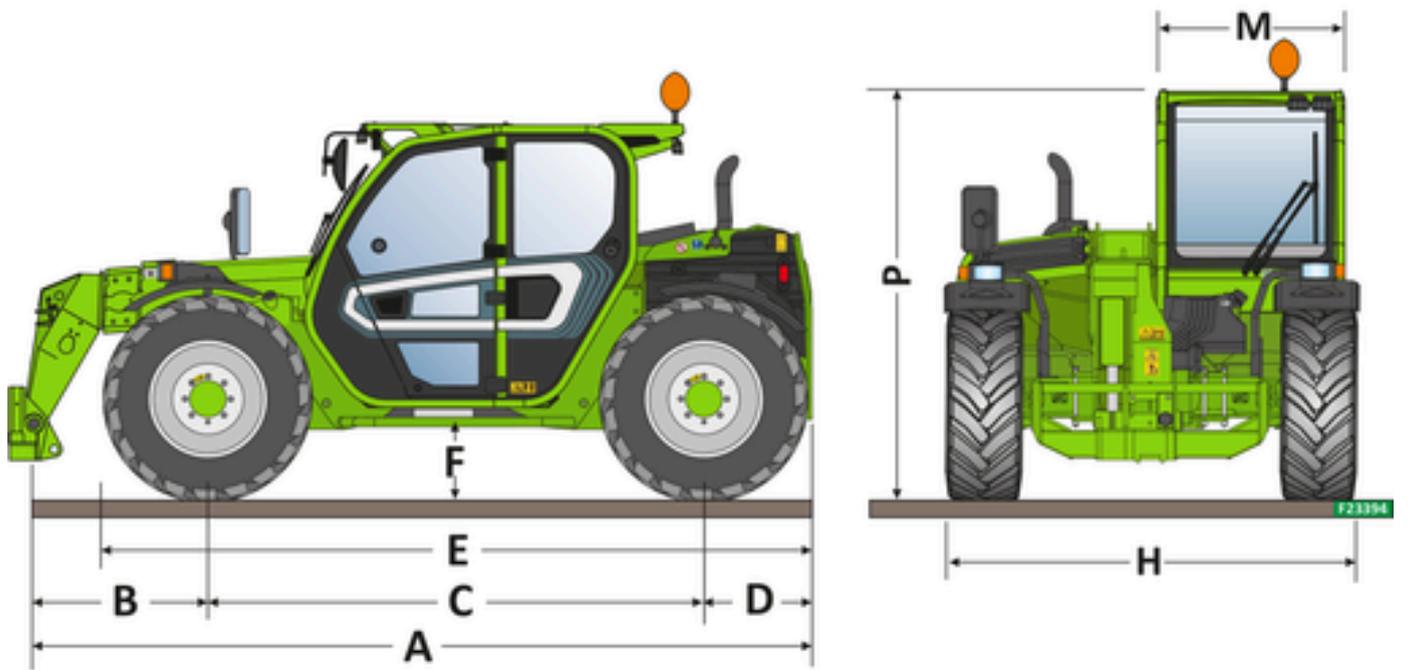

## Your Merlo dealer



### **MERLO S.P.A.**

Via Nazionale, 9  
12010 S. Defendente di Cervasca,  
(Cuneo) Italia  
Tel. +39 0171 614111

**[info@merlo.com](mailto:info@merlo.com)**  
**[www.merlo.com](http://www.merlo.com)**

