




## LD15 Flashlight

Fenix LD15 is the perfect portable AA flashlight in a very small size. Since one AA battery delivers 3 times the electrical volume of one AAA battery, the LD15 offers a brighter beam and much longer runtime with Fenix's advanced lighting technology.

Furthermore, the design featuring two modes of output, not only provides easy operation, but also strikes a delicate balance between the important dual requirements of high brightness and extended runtime. If you're looking for a powerful, long running EDC flashlight in the smallest size, LD15 is your perfect companion.



**LD15**  
Max 117 Lumens

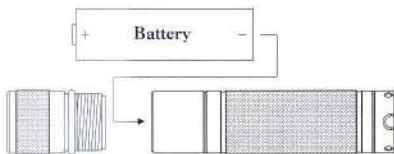

Adjustable Output Head

Battery Tube

### Features

- ⊗ Two types of output :
  - High output: 117 lumens (1 hour 40 minutes)
  - Low output: 8 Lumens (39 hours)
- ⊗ Max beam length: 49 meters
- ⊗ Peak Beam Intensity: 596 candela
- ⊗ Impact resistance: 1.5 meters
- ⊗ Waterproof to IPX-8 standard
- ⊗ Included accessories: key chain, lanyard
- ⊗ Cree XP-G LED (R4) with lifespan of 50,000 hours
- ⊗ Uses one 1.5V AA (Ni-MH, Alkaline) battery
- ⊗ 80mm (length) x16.6mm (diameter)
- ⊗ 21-gram weight (Excluding battery)
- ⊗ Digitally regulated circuit, maintains constant brightness
- ⊗ Reliable twist switch
- ⊗ Capable of standing up securely on a flat surface to serve as a candle
- ⊗ Made of durable aircraft-grade aluminum
- ⊗ Premium Type III hard-anodized anti-abrasive finish
- ⊗ Toughened ultra-clear glass lens with anti-reflective coating

Notice: The above-mentioned parameters (tested with a 2500mAh Ni-MH battery) are approximate and may vary between flashlights, batteries, and environments.

### Operation

Screw the bezel to turn on the flashlight, unscrew to turn it off. While the light is on, turn it off then turn it on within 1.5seconds to switch to the next output. Switching off for 1.5 seconds or more will restore the regulation circuit to the default setting.

Notice: The video for LD15 operation can be watched and downloaded though Fenix official website, please log onto the service channel ->'light operation video'

### Battery Replacement

Unscrew the bezel completely to insert the battery with the anode side (+) toward the LED assembly; screw the bezel back on to test.



**LD15**  
Max 117 Lumens

## Usage and Maintenance

- ⊗ Please don't disassemble the sealed head, doing so can cause damage to the flashlight and will void the warranty.
- ⊗ High-power flashlights need batteries capable of high current electric discharge. We strongly recommend the use of a rechargeable Ni-MH battery for its outstanding performance. Using an alkaline AA battery will decrease the runtime considerably at max output.

⊗ Please take your battery out of the flashlight if you will not use the light for a long time, or the power of the battery has run out. Otherwise, some poor batteries may leak and damage the light.

⊗ Please replace the O-ring if it becomes damaged after using for a long time, and regularly lubricate the o-rings so as to not erode the rubber. Doing so will also keep the flashlight properly sealed against water.

⊗ Clean the contacts of your light periodically, especially when the flashlight flickers abnormally or cannot light up.

There may be the several reasons as follows:

**Reason one:** the batteries need to be replaced.

**Solution:** replace batteries (confirm the correct installation orientation of anode+ and cathode-)

**Reason two:** the threads, PCB board contact or other contacts are dirty.

**Solution:** clean the contact points with an alcohol soaked cotton swab.

If the above methods do not solve the issue, contact your distributor and refer to the warranty policy.

Notice: The routine cleaning video can be watched and downloaded through Fenix official website, please log onto the service channel->'Maintenance for light'

## Product Warranty

We will replace products afflicted with manufacturing defects within 15 days of purchase and repair a light free of charge within 24 months of purchase if problems develop with normal use; if repair is required after 24 months from the date of purchase, we will charge for parts. The total repair fee is dictated by the cost of the replaced materials.

## Warranty Card Registration

We kindly suggest that you register your guarantee card on the official website for Fenixlight Limited. You can get an extra six-month warranty period once you have successfully registered. What's more, you could take part in the lottery of questionnaire at the same time.

## Warning

**LD15 is a high intensity lighting device and capable causing eye damage, avoid shining the light directly into the eyes**

**Avoid the use of 14500 rechargeable Li-ion battery or damage will be caused to the light circuit.**



**LD15**  
Max 117 Lumens

## User manual

*Fenix Flashlight  
Illuminate Your Adventure*