




TA21 Flashlight

Fenix TA21 utilizes the Fenix patent technology-mechanical revolving dimmer system for precisely selecting its 12 output modes, which offer TA21 better operation and more precise in output selecting compare with other revolving dimmer. Meanwhile, it runs much longer powered by two 3V CR123A Lithium batteries or one 3.7V 18650 Li-ion battery.

As the pioneer of mechanical revolving dimmer system, and with its reliable structure and unique appearance, Fenix TA21 is your ultimate option for your enjoyment or collecting.

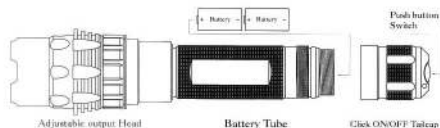

Features

- ⊗ Cree XR-E LED (Q5) with lifespan of 50,000 hours
- ⊗ 12 modes of output with mechanical revolving dimmer system (Patent)
- ⊗ 12 modes of output with 2 x 3V CR123A batteries:
 - Mode I(4 Lumens, 170Hrs) →
 - Mode II (18Lumens, 37Hrs) →
 - Mode III (35Lumens, 18Hrs) →
 - Mode IV (50Lumens, 12Hrs) →
 - Mode V (80Lumens, 7Hrs) →
 - Mode VI(120Lumens, 4Hrs) →
 - Mode VII (160Lumens, 2.5Hrs) →
 - Mode VIII (195Lumens, 2Hrs) →
 - Mode IX (225Lumens, 1.5Hrs) →
 - Mode X (230Lumens Strobe , 3Hrs) →
 - Mode XI (18Lumens Flash, 370Hrs) →
 - Mode XII (SOS, 30Hrs) → Repeat Cycle
- ⊗ OP textured reflector, throws beam over 200 meters
- ⊗ Digitally regulated output - maintains constant brightness
- ⊗ Powered by 2 x 3V CR123A Lithium batteries or 1 x 3.7V 18650 Li-ion battery
- ⊗ 168mm (Length) x 25.4mm (Diameter) x 39mm (Head)
- ⊗ 168-gram weight (excluding batteries)
- ⊗ Reverse-polarity protection circuit board
- ⊗ Made of durable aircraft-grade aluminum
- ⊗ Premium Type III hard-anodized anti-abrasive finish
- ⊗ Waterproof to IPX-8 Standard
- ⊗ Toughened ultra-clear glass lens with anti-reflective coating
- ⊗ Tactical tail cap switch with momentary-on function
- ⊗ Anti-roll, slip-resistant body design
- ⊗ Included accessories: lanyard, body clip, two spare o-rings, and rubber switch boot

Operation

When using the tail cap switch, depress the pushbutton switch halfway to momentarily activate the light. Depress the pushbutton completely to turn on the flashlight, the light will stay on until the pushbutton is depressed to turn off. When using the Fenix remote pressure switch, depress the pressure pad to activate the light, release to turn off. Revolve the mechanical ring-switch to achieve the 12 output levels according to the identifiers engraved on the flashlight.

Battery Replacement

Unscrew the tail cap to insert the batteries with the anode side (+) toward the light's head, screw the tailcap back on to test.



TA21
Max 225 Lumens



TA21

Max 225 Lumens

User manual

Usage and Maintenance

Ⓢ Please don't disassemble the sealed head, doing so can cause damage to the flashlight and will void the warranty.

Ⓢ Please use batteries of high quality, or the flashlight could be damaged by electrolyte leakage or battery break.

Ⓢ If the flashlight will not be used for a long time, please remove the batteries to avoid damage from battery leakage.

Ⓢ Please replace the O-rings if they are damaged after using for a long time and regularly lubricate the o-rings so as to not erode the rubber. Doing so will keep the flashlight properly sealed against water.

Ⓢ Please clean the contacts of your light from time to time, especially if the light flickers or doesn't light up. There may be several reasons for a flickering or not working light:

Reason A: The battery needs replacing.

Solution: Replace batteries (Please confirm the correct installation of anode and cathode).

Reason B: The threads, PCB board contact or other contacts are dirty.

Solution: Clean the contact points with an alcohol soaked cotton swab.

If the above methods don't work, please contact your distributor and refer to the warranty policy.

Product Warranty

We will replace products afflicted with manufacturing defects within 15 days of purchase and repair a light free of charge within 24 months of purchase if problems develop with normal use; if repair is required after 24 months from the date of purchase, we will charge for parts. The total repair fee is dictated by the cost of the replaced materials.

Warranty Card Registration

We kindly suggest that you register your guarantee card on the official website for Fenixlight Limited. You can get an extra six-month warranty period once you have successfully registered. What's more, you could take part in the lottery of questionnaire at the same time.

Warning

The TA21 is high-intensity lighting device and capable of causing eye damage, please avoid shining the light directly into the eyes.

18650 Li-ion battery is a kind of industrial battery with high capacity, we suggest the non-professionals using CR123A battery, if you insist on using 18650 battery to power the flashlight, please use those of high quality with circuit protection, or it may cause electrolyte leakage, battery break, or even injury to your body.